Lightwave RF

MEGAMAN®

Dimmer Switch (4 Gang)

Model No. JSJSLW440

Features

- RF Controllable Dimmer Switch
- Can be controlled by LightwaveRF Controllers
- Smartphone control (requires lightwave link)
- Standard wiring (no neutral required)
- Fits standard 35mm double back box
- Soft Start capability
- One touch restores previous light level
- 4 metallic finishes
- Compatible with dimmable LED lamps*
- Can perform multiway switching**

* Compatible with vast majority of dimmable LEDs see website for compatibility information
** Must work in combination with LightwaveRF 2-Way Dimmers to perform 2-Way Switching

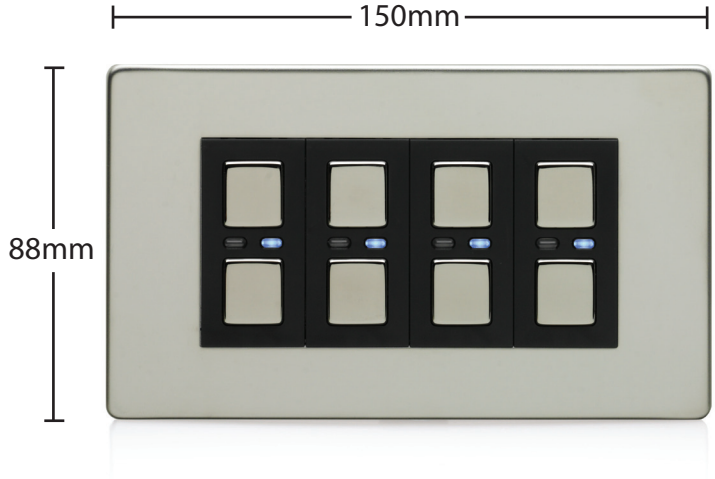

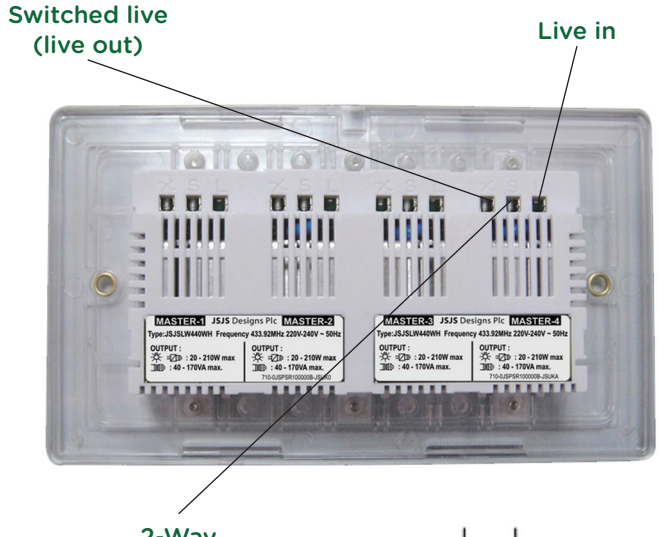

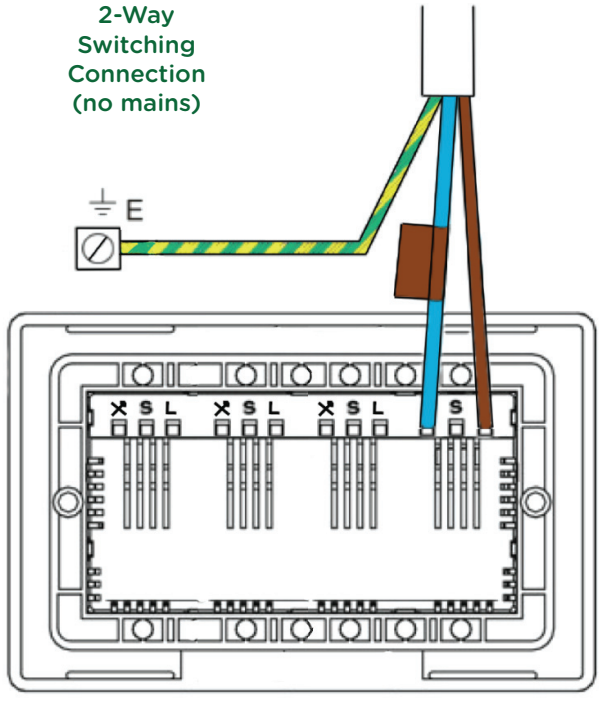

Specification

RF frequency: 433.92 MHz
Input rating: 220-240V~ 50Hz.
Output rating: 3W~210W max (per gang).
Incandescent Load: 20W-210W max (per gang).
Back Box Depth: 35mm min.
Earthing: Not essential (double insulated)
Standby Energy Use: Less than 1W
Wiring: Neutral wire NOT required
Warranty: 2 year standard warranty
Environment: For indoor use only

Available Finishes

Stainless Steel
White Metal
Chrome
Black Chrome

Regulatory Standards

CE Marked.